




## Product Specifications

Catalog No. 26460

# COATED STAINLESS STEEL SUSPENSION CABLE

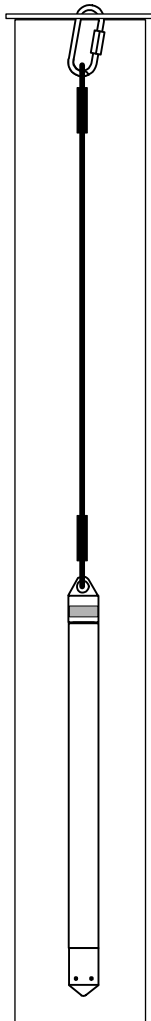

### DESCRIPTION

FEP\*-coated 304 stainless steel suspension cable. Designed for hanging a pre-programmed probe with an absolute (PSIA) pressure sensor while taking data. No communication capabilities, no venting. Nylon caps on cut ends of cable deter water incursion. Installation clamps included.

### CABLE RATINGS

Temperature	-40°C to 80°C (-40°F to 176°F)
Weight	0.43 kg /30 m (0.975 lb/100 ft)
Overall O.D.	2.2 mm (0.086875 in [approx. 1/16 in])

### BARE CABLE

Material	304 stainless steel, 7 x 7 strand
O.D.	1.2 mm (0.046875 in [3/64 in])
Breaking strength	270 lb

### COATING

Material	Recycled FEP*
Color	Blue
Wall thickness	0.5 mm (0.020 in)

\* FEP (fluorinated ethylene propylene) is the generic equivalent of DuPont Teflon®

1 800 4INSITU

(toll-free, US and Canada) or 970 498 1500 [www.in-situ.com](http://www.in-situ.com)

